








MULTIPLAY

4MYT40220T Avatar 401379 24 in x 24 in

Monolithic





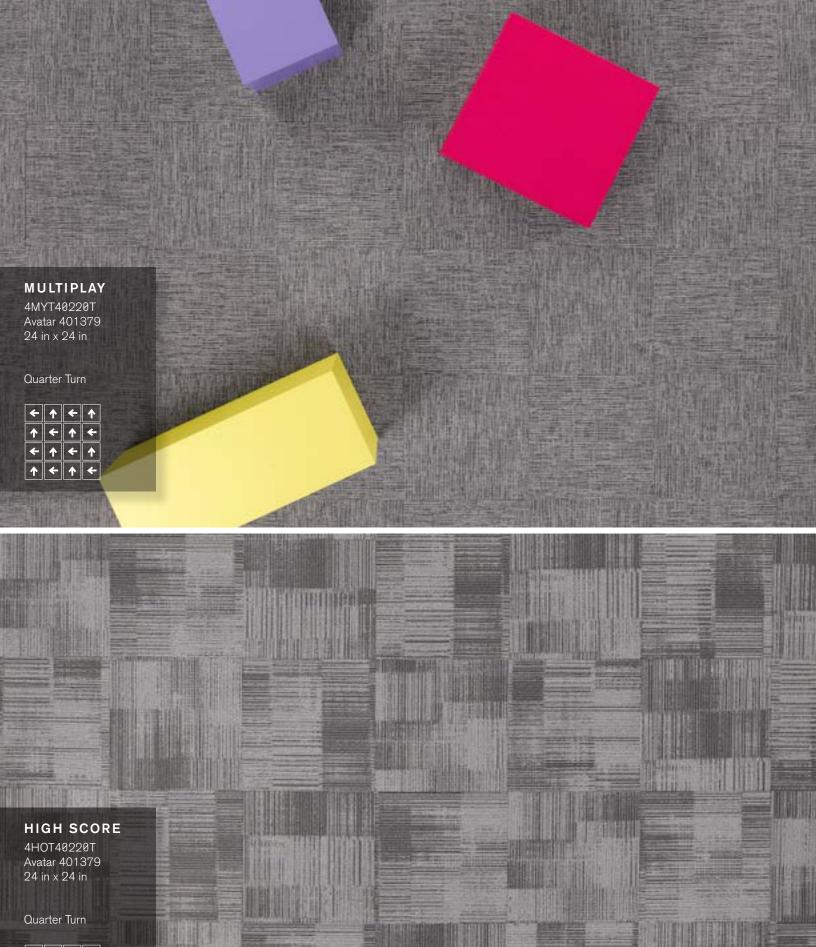

 Couarter Turn

 ← ↑ ← ↑

 ↑ ← ↑ ←

 ↑ ← ↑ ←









24 in x 24 in

Ashlar











Cheat Code 401382

authentic representation, but images may vary according to press run. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at 800.423.4709.



SPECIFICATIONS HIGH SCORE™ MULTIPLAY™

Style Number 4H0T4 4MYT4

Product Construction Tufted Textured Loop Tufted Textured Loop

Fiber Antron® Lumena™ Type 6,6 Nylon Antron® Lumena™ Type 6,6 Nylon

Dye Method Solution Dyed Soil/Stain Protection XTERA™ XTERA™ XTERA™

Secondary Backing
Broadloom High PerformancePC High PerformancePC

Carpet Tile NexStep® Cushion Tile / AFIRMA™ Hardback Tile NexStep® Cushion Tile / AFIRMA™ Hardback Tile

 Machine Gauge
 1/12 in (47.2 ends/10 cm)
 1/12 in (47.2 ends/10 cm)

 Stitches
 11.0/in (43.3 ends/10 cm)
 10.3/in (40.6 ends/10 cm)

Pile Density 4,891 oz/yd³ 4,647 oz/yd³

 High PerformancePC Broadloom
 50 oz/yd² (1,695.3 g/m²)
 50 oz/yd² (1,695.3 g/m²)

 NexStep® Cushion Tile
 88 oz/yd² (2,983.7 g/m²)
 88 oz/yd² (2,983.7 g/m²)

 AFIRMA™ Hardback Tile
 79 oz/yd² (2,678.6 g/m²)
 79 oz/yd² (2,678.6 g/m²)

Total Thickness

High PerformancePC Broadloom

0.240 in (6.1 mm)

0.245 in (6.2 mm)

0.340 in (8.6 mm)

0.345 in (8.8 mm)

 NexStep® Cushion Tile
 0.340 in (8.6 mm)
 0.345 in (8.8 mm)

 AFIRMA™ Hardback Tile
 0.220 in (5.6 mm)
 0.225 in (5.7 mm)

Broadloom Pattern Match Not Required Pattern Match Not Required
Carpet Tile None None

Radiant Panel Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) Smoke Density < 450 dm Corrected (ASTM-E662), Flaming < 450 dm Corrected (ASTM-E662), Flaming

Static ≤ 3.5 kV (AATCC-134), Step ≤ 3.5 kV (AATCC-134), Step

Flammability Passes Methenamine Pill Test (CPSC-FF1-70) Passes Methenamine Pill Test (CPSC-FF1-70)

Fast Track is Bentley's quick-ship program. This program is designed for maximum flexibility and expedited delivery to the client. High Score and Multiplay are available in 13 colorways in 18 in x 36 in and 24 in x 24 in NexStep® Cushion Tile, AFIRMA™ Hardback Tile and High PerformancePC Broadloom. Orders of 1500 square yards or less will be ready to ship within 10 business days of order. For orders exceeding 1500 square yards, please contact our Customer Care Concierge for availability.

Please inquire about product warranties for specific backing options. High Score and Multiplay are available in 13 standard colorways.











STYLE NUMBERS

Total Weight

Pattern Repeat

HIGH SCORE	MULTIPLAY	BACKING	SIZE
4HOT40620R	4MYT40620R	High PerformancePC Broadloom	12 ft (3.657 m) — also available in area rugs
4HOT40AA0T	4MYT40AA0T	NexStep® Cushion Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4HOT40220T	4MYT40220T	NexStep® Cushion Tile	24 in x 24 in (60.96 cm x 60.96 cm)
4HOT40AA0K	4MYT40AA0K	AFIRMA™ Hardback Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4HOT40220K	4MYT40220K	AFIRMA™ Hardback Tile	24 in x 24 in (60.96 cm x 60.96 cm)

RECOMMENDED CARPET TILE INSTALLATION METHODS

18 in x 36 in 24 in x 24 in


















Bentley's High PerformancePC, NexStep® Cushion Tile, and AFIRMA™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 – Sustainable Carpet Assessment (NSF 140). Six of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED®-EBOM) Gold certified facility.

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose, are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2015 Bentley Mills, Inc.



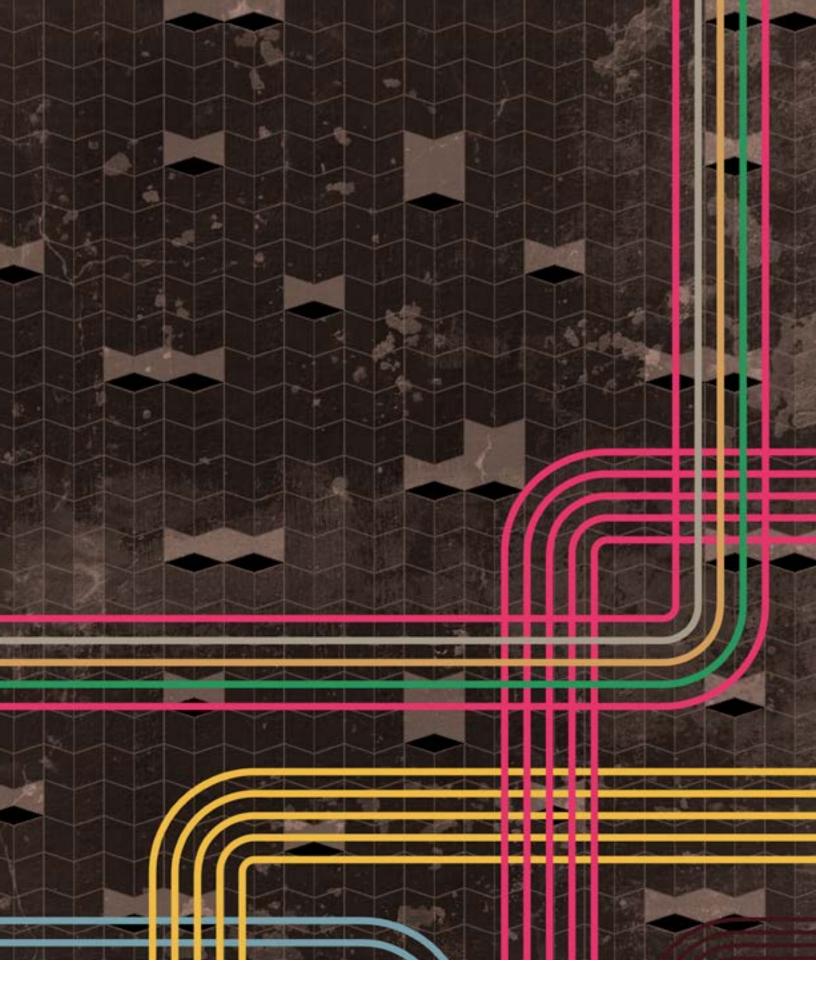

800.423.4709 | BENTLEYMILLS.COM 14641 E. DON JULIAN ROAD, CITY OF INDUSTRY, CA 91746